




TEREX CRANES

PPM

ATT 250/30

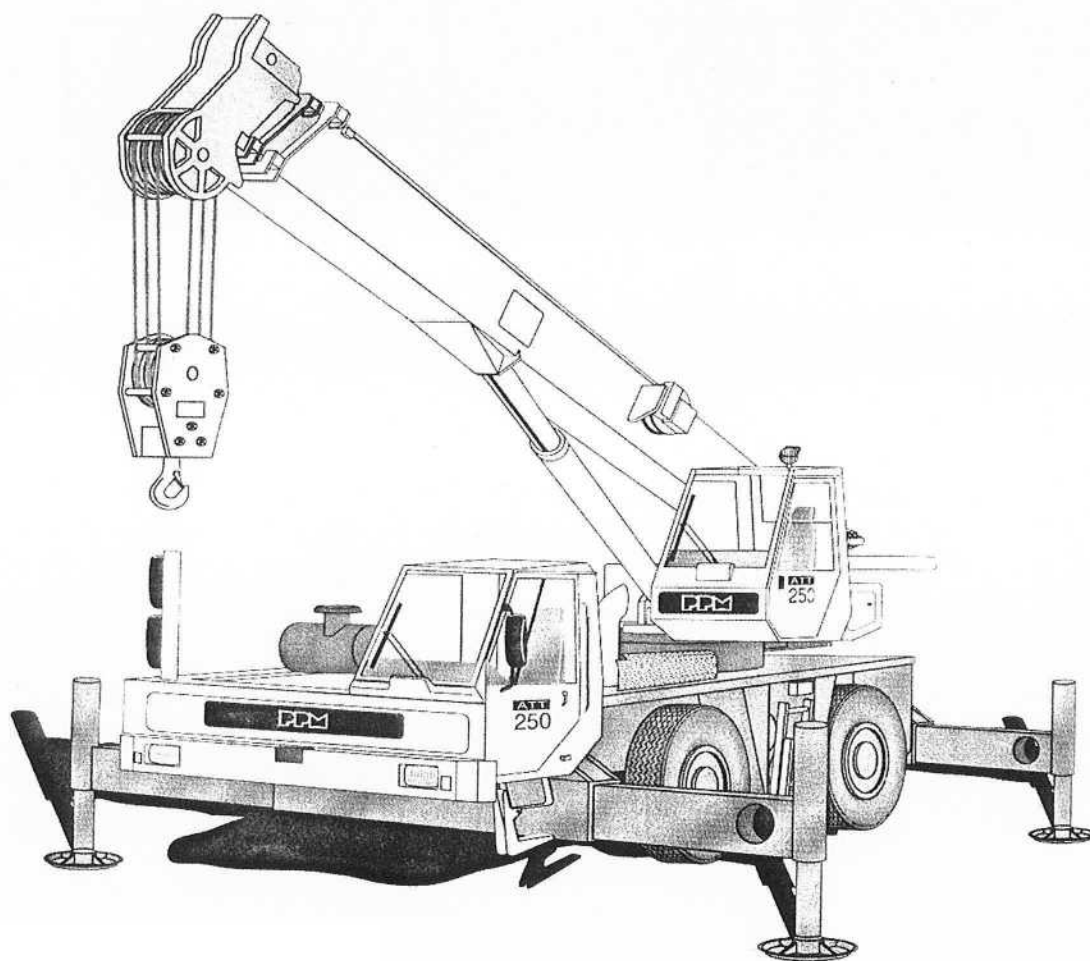


GRUAS
FAM
Guarnizo (Cantabria) - Telf. 942 55 80 00

ATT 250/30

Charges, hauteurs et portées
Lifting capacities, heights and radius
Traglasten / Hubhöhen
Cargas, alturas y alcances

Contrapeso 1.5 Tm

GRUAS
FAM
 Guarnizo (Cantabria) - Telf. 942 55 80 00

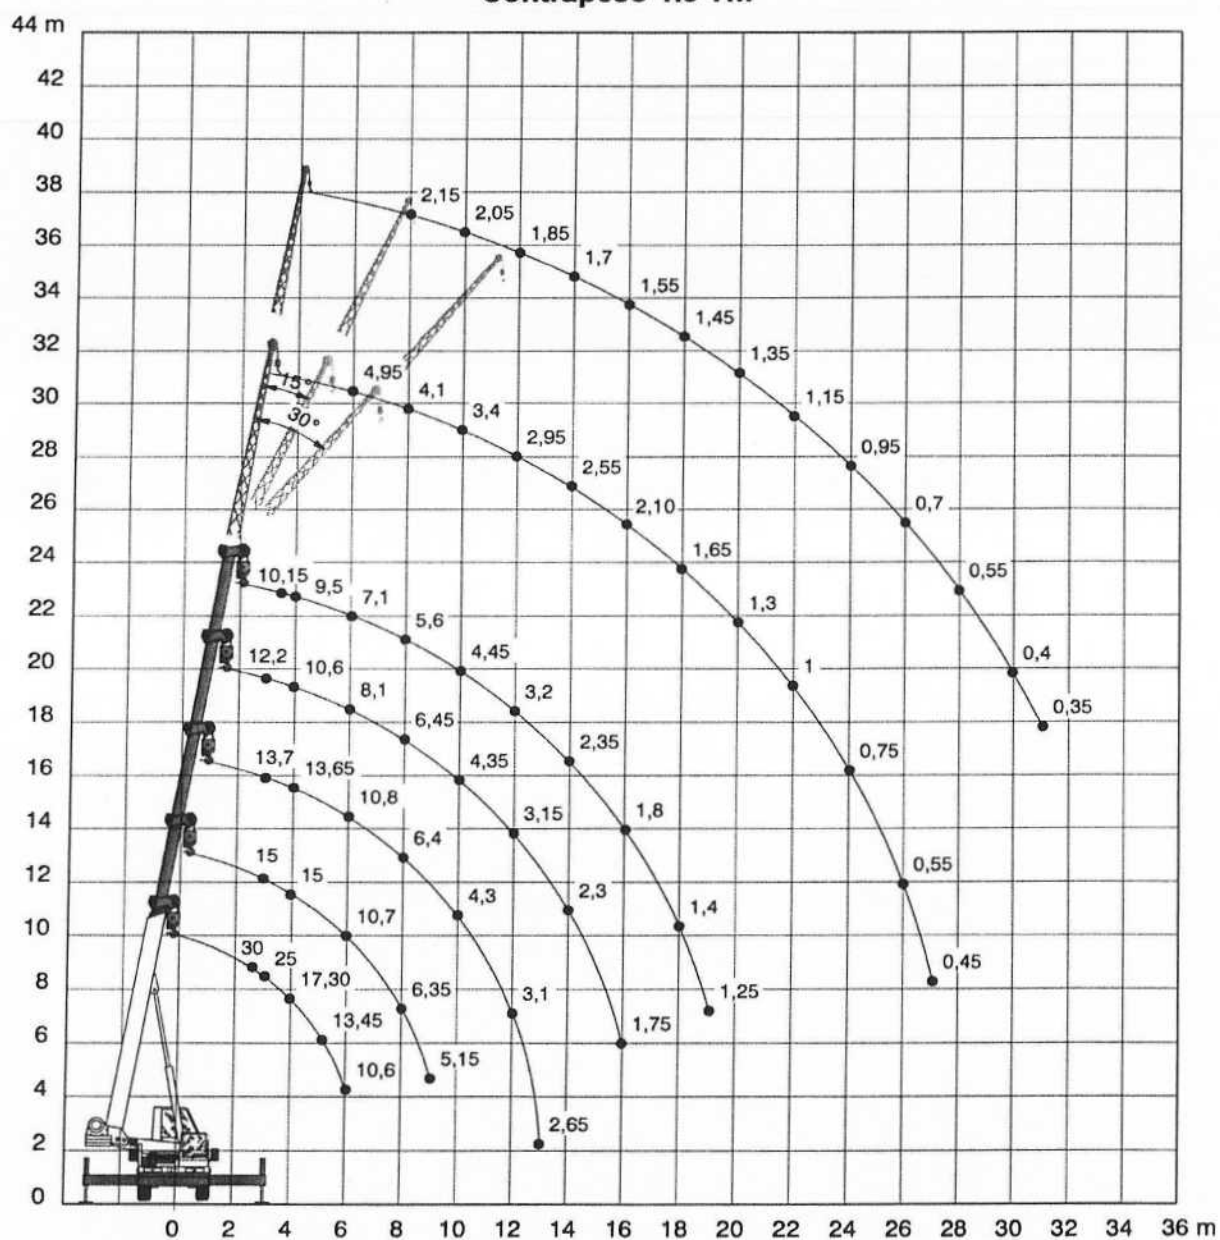





TEREX CRANES



Flèche principale - Main boom Hauptausleger - Pluma principal



FLECHE ENTIEREMENT TELESCOPIQUE DE 8,60 m A 22 m - FULLY TELESCOPIC BOOM FROM 8.60 m TO 22 m

VOLL HYDRAULISCHER AUSLEGER VON 8,60 m BIS 22 m - PLUMA TELESCOPICA DE 8,60 M A 22 M





	FLECHE ENTIEREMENT TELESCOPIQUE DE 8,6 m A 22 m - FULLY TELESCOPIC BOOM FROM 8.6 m TO 22 m VOLL HYDRAULISCHER AUSLEGER VON 8,6 m BIS 22 m - PLUMA TELESCOPICA DE 8,6 M A 22 M					
	8,60 m	11,94 m	15,30 m	18,64 m	22,00 m	
2,70	30,00					2,70
3	25,00	15,00	13,70	12,20		3
3,50	20,00	15,00	13,70	11,35	10,15	3,50
4	17,30	15,00	13,65	10,60	9,50	4
4,50	15,15	15,00	12,80	9,95	8,90	4,50
5	13,45	13,45	12,10	9,20	8,25	5
6	10,60	10,70	10,80	8,10	7,10	6
7		8,05	8,10	7,15	6,30	7
8		6,35	6,40	6,45	5,60	8
9		5,15	5,20	5,25	5,10	9
10			4,30	4,35	4,45	10
11			3,60	3,65	3,75	11
12			3,10	3,15	3,20	12
13			2,65	2,70	2,75	13
14				2,30	2,35	14
15				2,00	2,10	15
16				1,75	1,80	16
17					1,60	17
18					1,40	18
19					1,25	19

Contrepoids / Counterweight / Gegengewicht / Contrapeso : 1,5 T.Opcional 2.6 Tm



		EXTENSION 8 M / 15 M - 8 M / 15 M EXTENSION VERLÄNGERUNG 8 M / 15 M - PLUMIN 8 M / 15 M							
		18,65 m + 8 m	22 m + 8 m			22 m + 15 m			
									
	0°	0°	15°	30°	0°	15°	30°		
4	5,75							4	
4,5	5,50							4,5	
5	5,20							5	
6	4,75	4,95						6	
7	4,40	4,50						7	
8	4,05	4,10	3,35		2,15			8	
9	3,70	3,70	3,20	2,65	2,10			9	
10	3,40	3,40	3,05	2,55	2,05			10	
11	3,15	3,15	2,85	2,50	1,95			11	
12	2,90	2,95	2,65	2,45	1,85	1,45		12	
13	2,70	2,70	2,50	2,35	1,80	1,40		13	
14	2,55	2,55	2,35	2,25	1,70	1,35		14	
15	2,35	2,30	2,25	2,15	1,60	1,30	1,10	15	
16	2,10	2,10	2,10	2,05	1,55	1,30	1,10	16	
17	1,85	1,85	1,90	1,95	1,50	1,25	1,05	17	
18	1,65	1,65	1,75	1,75	1,45	1,20	1,05	18	
19	1,45	1,45	1,55	1,60	1,40	1,15	1,00	19	
20	1,30	1,30	1,40	1,45	1,35	1,15	1,00	20	
21	1,15	1,10	1,25	1,30	1,30	1,10	1,00	21	
22	1,00	1,00	1,05	1,10	1,15	1,05	0,95	22	
23	0,85	0,85	0,90	0,95	1,10	1,05	0,95	23	
24	0,75	0,75	0,80	0,85	0,95	1,00	0,90	24	
25		0,60	0,65	0,65	0,80	0,90	0,90	25	
26		0,55	0,55	0,55	0,70	0,80	0,90	26	
27		0,45	0,45	0,45	0,60	0,70	0,80	27	
28					0,55	0,65	0,70	28	
29					0,50	0,55	0,60	29	
30					0,40	0,50	0,55	30	
31					0,35	0,40	0,45	31	
32						0,35	0,35	32	

Contrepoids / Counterweight / Gegengewicht / Contrapeso : 1,5 T.

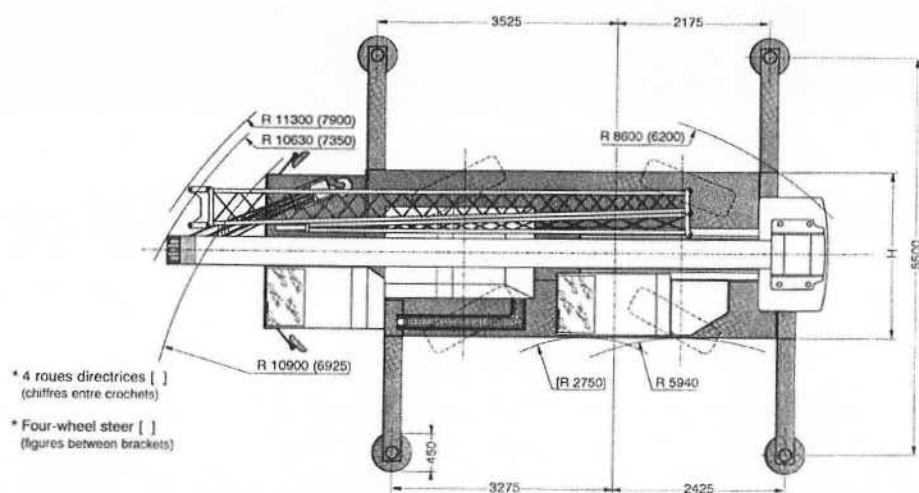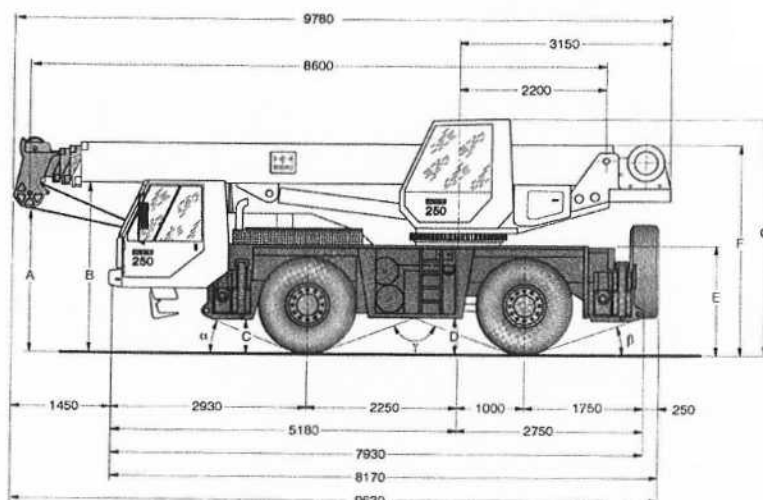

	A	B	C	D	E	F	G	G*	H	α	β	γ
14.00 R 25	2134	2485	420	475	1570	3080	3450	3370	2500	20°	20°	140°
16.00 R 25	2184	2535	470	525	1620	3130	3500	3420	2650	22°	21°	136°

(*) Machine abaissée de 80 mm - (*) Machine in lowered position